


# **PRODUCT DATA SHEET**

## Description

ONETHATCH<sup>™</sup> Bamboo Pole is designed to replicate the appearance, three-dimensional surfaces and weathered textures of natural bamboo poles. Wherever you installed it, you'll be astonished at how well it withstands harsh climate conditions, pest damage, and general wear & tear for decades while still looking fabulous.

Note: ONETHATCH<sup>™</sup> Bamboo Pole should not be used for support structures.

### Drawing

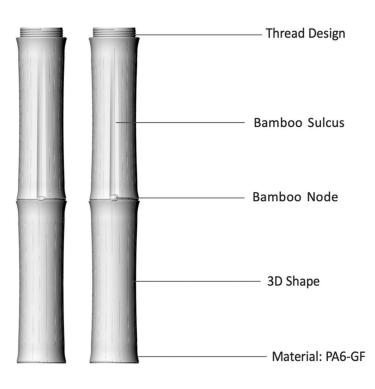

#### Feature

- Fire and Weather Resistant
- Easy to Install
- Eco-Friendly (Non-PVC)

- Thickness
- Maintenance Free
- 20 Year Guarantee



## **Specification**



Product Number: OT1075XXX Size: 3OD x 20" (Dia 75 x 508mm) 2.48ID x 20" (Dia 63 x 508mm) Thickness: 0.177" (4.5mm) Weight: 1.33Ib (0.60kg) Material: PA6

#### Dia 2.5" Synthetic Bamboo Pole

Product Number: OT1065XXX Size: 2.5OD x 20" (Dia 65 x 508 mm) 2ID x 20" (Dia 50.9 x 508mm) Thickness: 0.177" (4.5mm) Weight: 1.17lb (0.53kg) Material: PA6

#### Dia 2" Synthetic Bamboo Pole

Product Number: OT1050XXX Size: 2OD x 20" (Dia 50 x 508mm) 1.59ID x 20" (Dia 40.5 x 508mm) Thickness: 0.158" (4mm) Weight: 0.72Ib (0.33kg) Material: PA6

#### Dia 1.5" Synthetic Bamboo Pole

Product Number: OT1040XXX Size: 1.5OD x 20" (Dia 40 x 508mm) 1.09ID x 20" (Dia 27.7 x 508mm) Thickness: 0.138" (3.5mm) Weight: 0.49Ib (0.22kg) Material: PA6

#### Dia 1" Synthetic Bamboo Pole

Product Number: OT1025XXX Size: 1OD x 20" (Dia 25 x 508mm) 0.63ID x 20" (Dia 16.2 x 508mm) Thickness: 0.138" (3.5mm) Weight: 0.29Ib (0.13kg) Material: PA6

Published November 2020



## Variations

**Note:** The colors provided below are a guide only. We recommend that you request samples from us for final color selection or approval.





**Standard Color:** ONETHATCH<sup>™</sup> Bamboo Pole is offered in two tones as standard: "Sundried", and "Light Brown".







Young\*

Olive\*

Green\*





Dark Brown\*

Transparent\*

**Special Color:** Colors with asterisk around the color name are special colors, subject to minimum order quantity. Contact us for more detail.



ITEM NO.	Dia 1"(25mm)	Dia 1.5"(40mm)	Dia 2"(50mm)	Dia 2.5"(65mm)	Dia 3"(75mm)
Sundried Color (Medium FR)	OT1025089	OT1040089	OT1050089	OT1065089	OT1075089
Sundried Color (High FR)	OT1025089F	OT1040089F	OT1050089F	OT1065089F	OT1075089F
Light Brown Color (Medium FR)	OT1025686	OT1040686	OT1050686	OT1065686	OT1075686
Light Brown Color (High FR)	OT1025686F	OT1040686F	OT1050686F	OT1065686F	OT1075686F

**Fire Rated:** Available in two models: "High FR", "Medium FR". "High FR" product has slow flame spread index and smoke developed index compared to "Medium FR" product.

**Texture:** ONETHATCH<sup>™</sup> Bamboo Pole is offered in two hand painted textures: "Plain', "Fresh" and "Aged". Please help to advise us your preference.







01. Plain

02.Fresh

03. Aged

**Material:** ONETHATCH<sup>™</sup> Bamboo Pole is made with special reinforced PA6 resins. Product can be custom produced with ASA/ABS resins for full container order. Contact us for more information.

**End Cap:** The End Caps are available for all models to conceal the last threads and keep the elements out.

### Packing

	PCS/CTN	N.W./CTN	CTN SIZE	CTN/CTR 20' GP	CTN/CTR 40' GP
Dia 25mm(1inch) Bamboo Pole	225	29.66kg (65.40lbs)			
Dia 40mm(1.5inches) Bamboo Pole	110	25.20kg (55.56lbs)			
Dia 50mm(2inches) Bamboo Pole	72	24.76kg (54.59lbs)	535*430*430mm (21*16.9*16.9")	300	550
Dia 65mm(2.5inches) Bamboo Pole	42	23.35kg (51.48lbs)			
Dia 75mm(3inches) Bamboo Pole	30	19.25kg (42.44lbs)			

Published November 2020



## **Storage**

Store ONETHATCH™ Bamboo Pole in a dry, well-ventilated location.
Do not expose cartons to excessive moisture.
Do not expose cartons from direct sunlight.
Excessive moisture may cause cartons to collapse.
Keep away from the heat source; handle with care.

### Maintenance

ONETHATCH<sup>™</sup> Bamboo Pole was designed so that no maintenance is needed to deliver the best performance. However, it is recommended to do an annual inspection.

## Warranty

ONETHATCH<sup>™</sup> Bamboo Pole has a 10-year limited warranty that covers sudden color fading in accordance with current warranty terms.

### Note

The above product information is given to the best of our knowledge based on laboratory tests and practical experience. However, due to different applications, site conditions, and constraints beyond our control, we are not liable for any circumstances due to or relating to our products' application or usage. We reserve the right to alter or modify any data given without any prior notice. Therefore, it is best to contact us should you have any concerns or inquiries.

## Contact

ONETHATCH<sup>™</sup> products are manufactured by:

#### Xiamen Jinyang Industrial Co., Ltd.



Address: 8 Fengling 2nd Rd, Tong'an District, Xiamen, Fujian, China, 361100 Website: <u>onethatch.com</u> Email: <u>sales@onethatch.com</u> Email: <u>info@jinyangindustry.com</u> Tel: +1 352-284-9958

Published November 2020