



SYNTHETIC THATCH

Installation Manual


This installation manual is for ONETHATCH REED installation exclusively.
For other product installation, please refer to our other installation guides.





01. INSTALLATION - EAVE

INSTALL WATERPROOFING MEMBRANE.

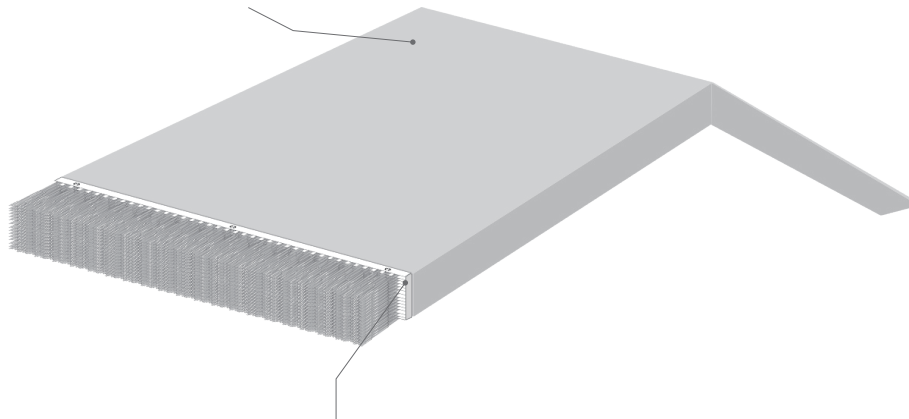

FASTEN "EAVE PANEL" TO FACIA WITH
SELF-TAPPING 2-3" DECK SCREWS.



PART: Eave Panel

COVERAGE: 0.61pcs/ft (2pcs/m)



金阳实业
JINYANG INDUSTRIAL

XIAMEN JINYANG INDUSTRIAL CO., LTD.

Address: 8 Fengling 2nd Rd, Tong'an District, Xiamen, Fujian, China, 361100

Website: onethatch.com

Email: sales@onethatch.com


Email: info@jinyangindustry.com

Tel/WhatsApp: +1-352-284-9958




02. INSTALLATION - STARTER

FASTEN AND ALIGN THE "STARTER PANEL"
WITH THE ENDS OF THE "EAVE PANEL".
FASTEN WITH 1.75" 11 GA. STAINLESS STEEL
RING SHANK.

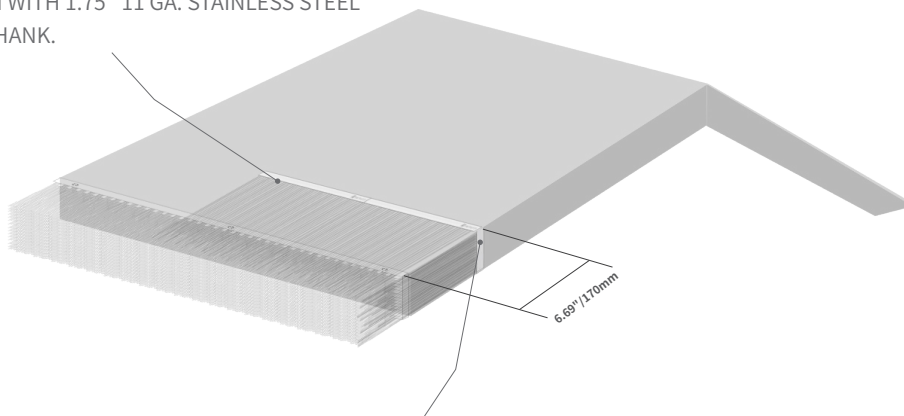

CUT " STARTER PANEL" AND FASTEN IT TO
GABLE FACIA.



PART: Starter Panel
COVERAGE : 0.61pcs/ft (2pcs/m)

XIAMEN JINYANG INDUSTRIAL CO., LTD.

Address: 8 Fengling 2nd Rd, Tong'an District, Xiamen, Fujian, China, 361100
Website: onethatch.com
Email: sales@onethatch.com
Email: info@jinyangindustry.com
Tel/WhatsApp: +1-352-284-9958


业
家
建
筑
JINYANG INDUSTRIAL






03. INSTALLATION - FIELD

FASTEN "FIELD PANEL" WITH 1.75" 11 GA.
STAINLESS STEEL RING SHANK.

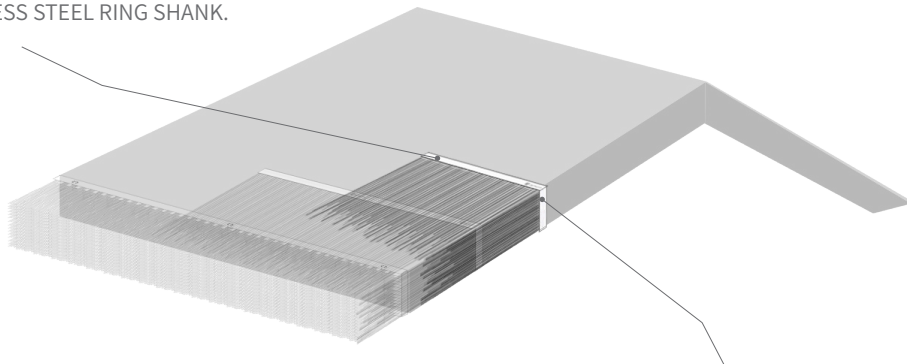

CUT "FIELD PANEL" AND FASTEN IT TO
GABLE FACIA.



PART: Field Panel
COVERAGE: 1.13pcs/Sq.ft (12pcs/m2)




兴业
JINYANG INDUSTRIAL

XIAMEN JINYANG INDUSTRIAL CO., LTD.

Address: 8 Fengling 2nd Rd, Tong'an District, Xiamen, Fujian, China, 361100
Website: onethatch.com
Email: sales@onethatch.com
Email: info@jinyangindustry.com
Tel/WhatsApp: +1-352-284-9958



04. INSTALLATION - HIP

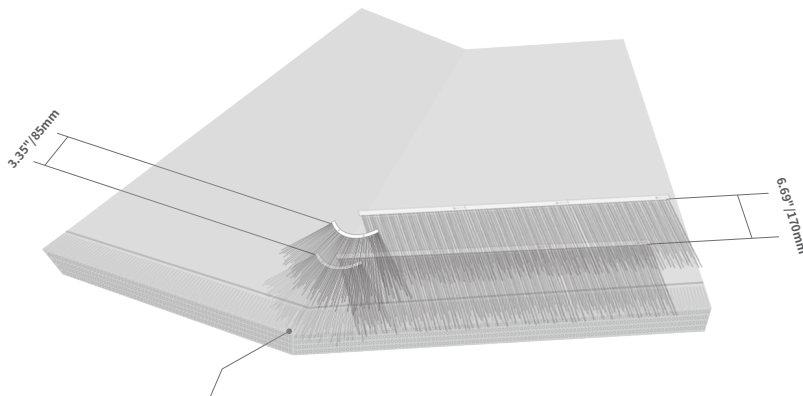

INSTALL TWO "HIP & RIDGE PANEL" COURSES
PER "FIELD PANEL" COURSE.
FASTEN WITH 1.75" 11 GA. STAINLESS STEEL
RING SHANK.




PART: Hip & Ridge Panel
COVERAGE: 3.65pcs/ft (12pcs/lm)



05. INSTALLATION - VALLEY

INSTALL THE "FIELD PANEL" FLUSH TO ROOF VALLEY. DEPENDING ON THE PITCH OF THE ROOF, THE PANEL MAY NEED TO BE TRIMMED BACK SO IT DOES NOT CREATE A BUILD UP IN THE VALLEY CENTER. FASTEN WITH 1.75" 11 GA. STAINLESS STEEL RING SHANK.

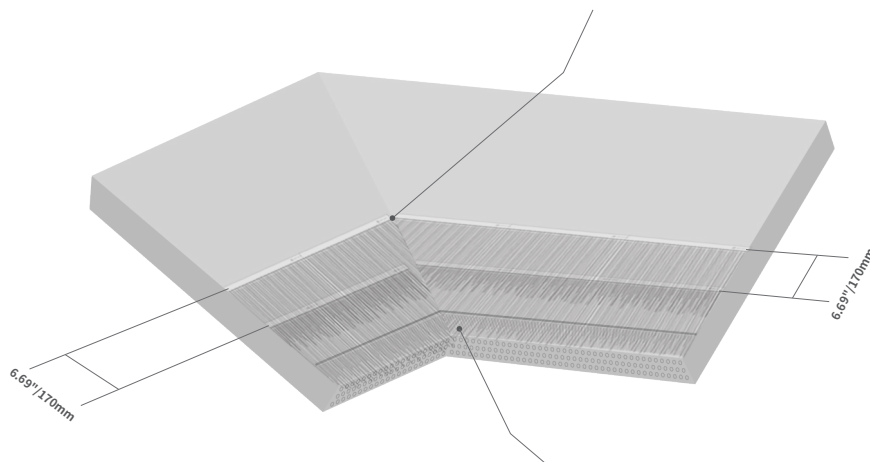

CUT "EAVE PANEL" TO FIT VALLEY CORNER
FASTEN WITH 2-3" STAINLESS STEEL SELF-TAPPING DECK SCREWS.

XIAMEN JINYANG INDUSTRIAL CO., LTD.


Address: 8 Fengling 2nd Rd, Tong'an District, Xiamen, Fujian, China, 361100
Website: onethatch.com
Email: sales@onethatch.com
Email: info@jinyangindustry.com
Tel/WhatsApp: +1-352-284-9958





06. INSTALLATION - RIDGE

THE PANEL MAY NEED TO BE TRIMMED AND MANIPULATED TO CREATE A SMOOTH TRANSITION.

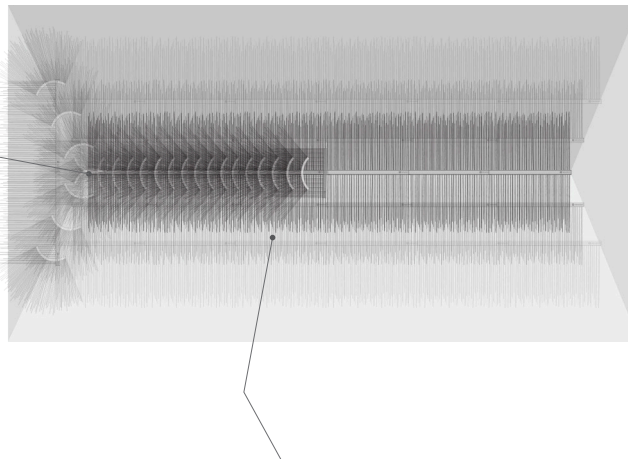

INSTALL "HIP & RIDGE PANEL" BEGINNING AT THE ENDS OF THE RIDGE, WORKING TOWARD THE CENTER.
FASTEN WITH 1.75" 11 GA. STAINLESS STEEL RING SHANK.