



1. INTRODUCTION


Designed to capture the beauty of natural bamboo matting, FAUXBAM® Woven Mat is handcrafted from durable, recyclable, and non-toxic synthetic fiber. Whether installed on walls, ceilings, or decorative structures, this faux bamboo matting delivers the authentic look of natural bamboo while offering exceptional resistance to harsh weather, pests, and everyday wear for years to come.

2. FEATURES AND BENEFITS

- **20-Year Warranty / Lasts a Lifetime Indoors. Built for lasting performance indoors and out.**
- **No Maintenance Required. No staining, sealing, or ongoing upkeep needed.**
- **Easy to Clean. Simple to wipe down and keep looking fresh.**
- **No Sub-Deck Required. Installs directly on suitable surfaces.**
- **ASTM E84 Fire Rated. FR option available for code and insurance needs.**
- **Easy & Fast to Install. Lightweight and installer-friendly.**
- **Realistic Looking. Captures the natural look of real bamboo.**
- **Eco-Friendly(Non-PVC). Recyclable and free from PVC.**

3. SIZE

FAUXBAM® Woven Mat is offered in 1.22 × 2.44 m (4 × 8 ft) panels for standard panel applications, and 1.22 × 50 m (4 × 164 ft) rolls for large-scale, seamless installation. Custom sizes are also available upon request.

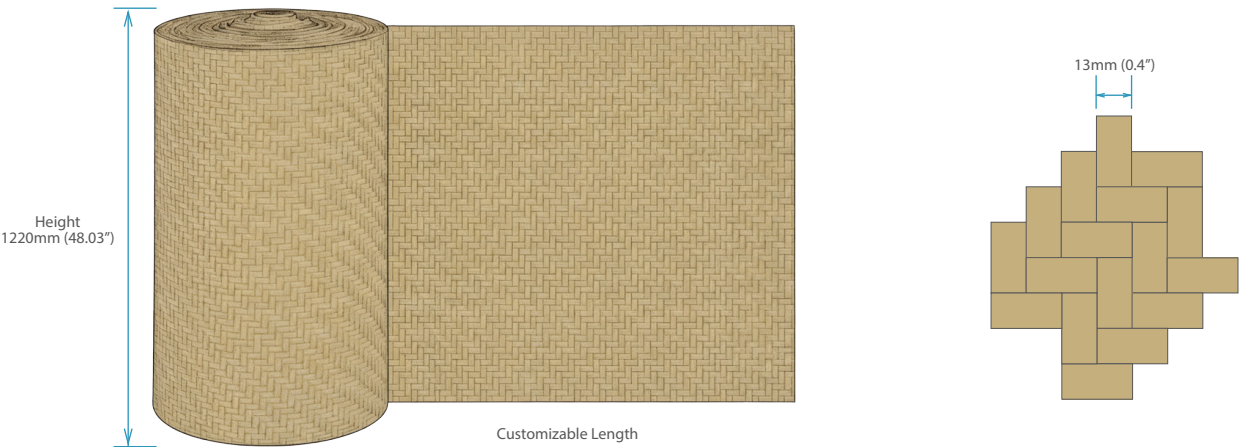

4. COLOR

Available in five beautiful standard colors: Teak, Walnut, Carbonized, Ebony, and Golden Oak. Custom colors are available for commercial projects.



01. Teak



02. Walnut



03. Carbonized



04. Ebony



05. Golden

5. PART NUMBER

Standard part numbers are listed below by color and format. NFR stands for Non-Fire-Retardant, while FR stands for Fire-Retardant. The FR version meets ASTM E84 Class A fire-rating requirements.

PART	TEAK	WALNUT	CARBONIZED	EBONY	GOLDEN OAK
Standard Sheet	NFR: WMTK24NFR FR: WMTK24FR	NFR: WMWN24NFR FR: WMWN24FR	NFR: WMCB24NFR FR: WMCB24FR	NFR: WMEB24NFR FR: WMEB24FR	NFR: WMGO24NFR FR: WMGO24FR
Standard Roll	NFR: WMTK500NFR FR: WMTK500FR	NFR: WMWN500NFR FR: WMWN500FR	NFR: WMCB500NFR FR: WMCB500FR	NFR: WMEB500NFR FR: WMEB500FR	NFR: WMGO500NFR FR: WMGO500FR

6. SPECIFICATION

PART	WEIGHT	SIZE	COVERAGE	MATERIAL
Standard Sheet	11.2 lbs (5.1 kg)	4 x 8 ft (1220 x 2440 mm)	32 sq.ft (3.0 sqm)	HDPE
Standard Roll	228.6 lbs (103.7 kg)	4 x 164 ft (1220 x 50000 mm)	656 sq.ft (61.0 sqm)	HDPE

7. SHIPPING & ORDER


PART	PCS / PKG	PKG SIZE	N.W / PKG
Standard Sheet	280 pcs	98 x 50 x 39 in (249 x 127 x 100 cm)	3,188 lbs (1,446 kg)
Standard Roll	15 rolls	48 x 87 x 53 in (122 x 220 x 135 cm)	3,131 lbs (1,420 kg)

8. WARRANTY


FAUXBAM® Woven Mat is backed by a 20-year limited warranty covering defects in materials and workmanship, subject to the applicable warranty terms and conditions.

9. INSTALLATION GUIDE

Tools ►




Tape Measure



Electric Welder




Scissor

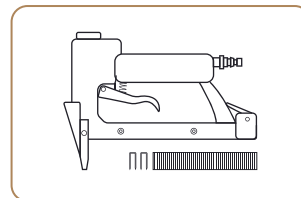


Staple Gun


Preparation ►

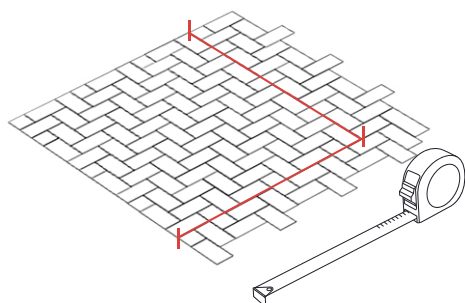

01.Measure and mark the cutting lines.

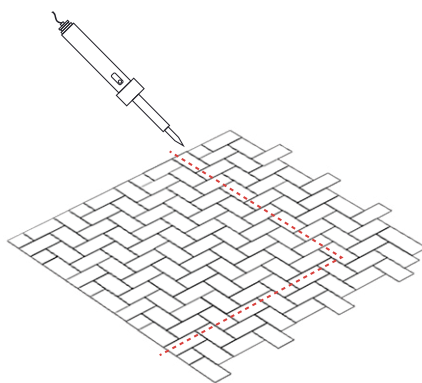


02.Weld between the fibers along the marked line.

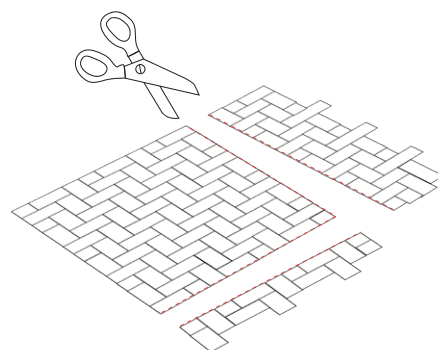


03.Cut the material along the line.

Installation ►

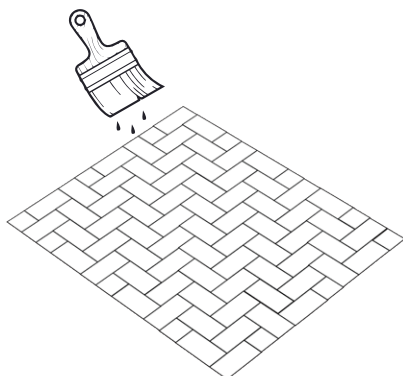

01.Coat the back of the material with contact cement adhesive and attach it to the substrate.

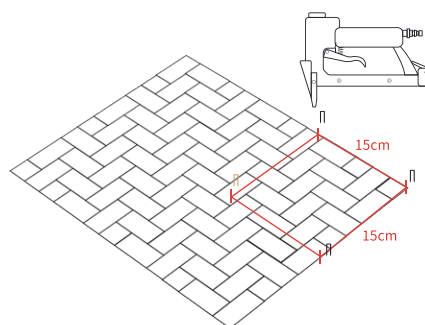

02.Place a nail or staple every 15cm in each direction.